


## PERNO DOBLE ARMADO

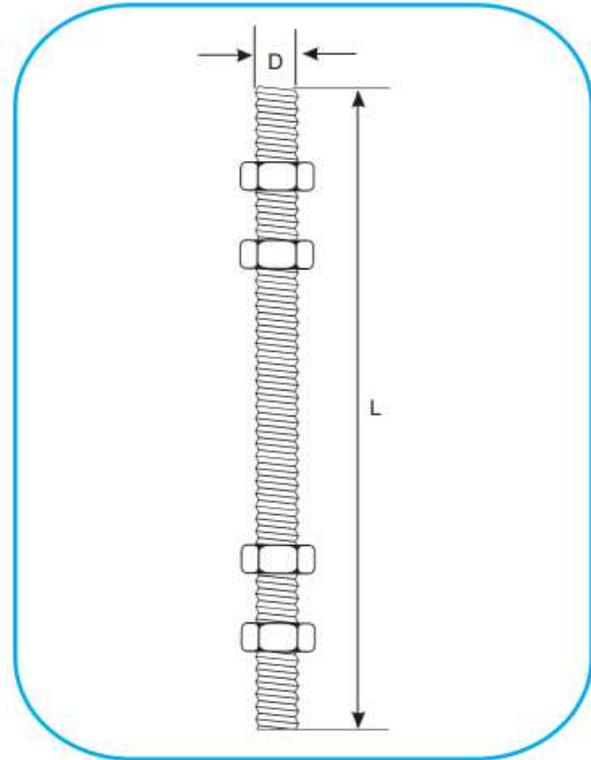

## CARACTERÍSTICAS TÉCNICAS

**MATERIAL:**  
Acero SAE 1020

**ACABADO:**  
Galvanizado en  
Caliente  
Norma: ASTM - A153

**NORMA:**  
ANSI C135.1

| CÓDIGO   | DIÁMETRO ØD<br>Pulg (mm) | Longitud (L)<br>Pulg (mm) | Cargar Rotura<br>Mínima (kN) |
|----------|--------------------------|---------------------------|------------------------------|
| FE 00580 | 5/8" (16)                | 14" (356)                 | 55                           |
| FE 00581 | 5/8" (16)                | 16" (406)                 | 55                           |
| FE 00582 | 5/8" (16)                | 18" (457)                 | 55                           |
| FE 00583 | 5/8" (16)                | 20" (508)                 | 55                           |
| FE 00584 | 5/8" (16)                | 22" (559)                 | 55                           |
| FE 00585 | 5/8" (16)                | 24" (609)                 | 55                           |
| FE 00586 | 5/8" (16)                | 26" (660)                 | 55                           |
| FE 00587 | 3/4" (19.05)             | 16" (406)                 | 77                           |
| FE 00588 | 3/4" (19.05)             | 18" (457)                 | 77                           |
| FE 00589 | 3/4" (19.05)             | 20" (508)                 | 77                           |
| FE 00590 | 3/4" (19.05)             | 22" (559)                 | 77                           |
| FE 00591 | 3/4" (19.05)             | 24" (609)                 | 77                           |
| FE 00592 | 3/4" (19.05)             | 26" (660)                 | 77                           |